

GRAND LIGHTING™

M20AT Track Mount LED Gobo Projector

TABLE OF CONTENTS 2

INTRODUCTION 3

 Before You Begin 3

 Contents 3

 Safety Information 3

OPERATION 4

 An Overview of Your Light 4

 Installation Guide 4

 Ensuring Your Light is Water Tight 4

 Focusing 4

GOBOS 5

 Gobo Specifications 5

 Changing / Installing Your Gobo 5

TECHNICAL SPECIFICATIONS 6

 Photometric Data 6

 Power Supply | Light source 6

 Fixture Dimensions 7

SERVICE AND WARRANTY 9

 Standard Warranty 9

 Service, Warranty Claims and Returns 9

BEFORE YOU BEGIN

- Open the contents of the box and check that the goods have not been damaged during transit.

NOTE: You must notify us of any suspected damage within 48 hours upon receiving the goods in order for us to follow up with the freight company.

- Check that you have received the correct goods including projector and gobo (if ordered as a package).
- If you ordered your projector and gobo as a package deal, your gobo should already be installed in the projector ready for use.

Any claims, returns or incorrect supply must be lodged within 48 hours of receiving the goods.

CONTENTS

- M20AT Track Mount LED Gobo Projector
- Gobo (if ordered as a package)
- Quick Start Guide

SAFETY INFORMATION

Most units will come supplied with a gobo, check to see the projector works for the proposed location before proceeding with the install.

Check the mounting surface is suitable to support the weight of the unit. If a safety cable must be fitted make sure to secure it to the surface mount.

There is an adjusting point to help with projector positioning.

Always disconnect the unit from power when changing the gobo.

WARNING: Do not cover the heat sink or driver with anything as they will need free air flow.

AN OVERVIEW OF YOUR LIGHT



INSTALLATION GUIDE

The unit is fitted with an internal power supply and universal track adapter suited to 3 circuit 4 wire tracks (selux, EUTRAC & Global 3 circuit track). Input voltage range of 220-240V AC. If you dont already have a suitable track, see our other mounting options (surface mount/ recessed). Or a qualified electrician can install a compatible track for you.

Always check to see that you are happy with the projection location before installing.

Please note: the track adapter goes into the track one direction. The light itself can be positioned in any direction.

The positioning of your projector can be adjusted via two points (see picture above). The up/down tilt is a spring loaded adjustment, pull outwards to reposition and tighten. Rotate from 0 deg - approx 350deg. Once installed and powered up adjust the focus turning the front lens.

MAINTENANCE

This unit is low maintenance, see key points below to ensure it runs for many years.

- Ensure the fixture remains in a clean dry area.
- When required, wipe away any dust using a microfibre cloth.
- Be sure to power down the unit at least once a day for an hour to extend the life of the LED capsule.

FOCUSING

Once you have the position of your projector correct (see installation guide), spin the front lens (see picture above) to achive the correct focus. Use the adjustment knob to index your gobo.

GOBO SPECIFICATIONS

Suitable material: Metal or Borosilicate glass
Gobo size: 37.5mm outside diameter +0/-0.3mm
Maximum image diameter: 28mm
*a larger image area can be used for soft edges eg. breakups
Maximum thickness: up to 5.0mm

If in doubt please contact Gobotech - www.gobotech.com.au to confirm the gobo specifications for the fixture model you have quoting the serial number.

CHANGING / INSTALLING YOUR GOBO

To change the gobo, firstly you need to remove the unit from power.

Undo the unit from the centre of the projector to access the gobo.

Once the front half of the unit is removed you will see where the gobo is mounted into the gobo holder. If there is a gobo already mounted in the light begin by removing the metal circlip which is holding the gobo in place. Swap out the gobo for your new one and do not forget to replace the metal circlip.

Glass gobos have a reflective mirror side and a black non reflective or white matt surface. **Glass Gobos are not reversible, they MUST be inserted with the reflective side facing the lamp.** See diagram below showing the order of inserting the gobo into the light.

Make sure the circlip is pushed down so that the gobo is sitting flat, if not you will struggle to focus evenly on the gobo.




Undo the unit from the centre of the projector to access the gobo.



Once the front half of the unit is removed, you will see where the gobo is

The reflective / mirror side must face the LED light source

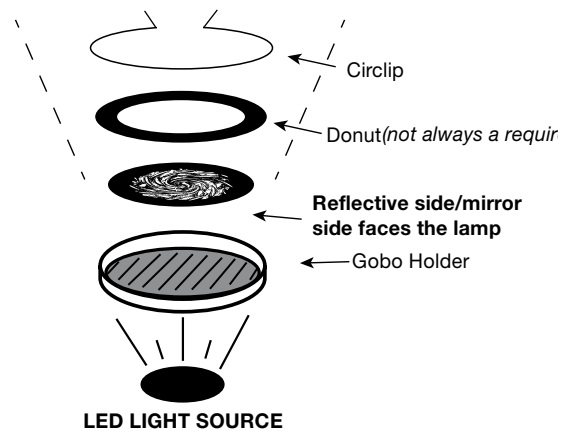

PHOTOMETRIC DATA

	M20 STANDARD LENS						
Projection Diameter (m)	0.79	0.98	1.18	1.38	1.57	1.77	1.97
Luminance (lux)	2280	1459	1013	744	570	450	365
Projection Distance (m)	2.0	2.5m	3.0	3.5	4.0	4.5	5.0

	M20 WIDE LENS						
Projection Diameter (m)	1.18	1.48	1.78	2.07	2.37	2.67	2.96
Luminance (lux)	1200	768	533	392	300	237	192
Projection Distance (m)	2.0	2.5m	3.0	3.5	4.0	4.5	5.0


*Lux values indicated are not peak values, which may be higher.
We give average LUX readings taken under actual tests.*

POWER SUPPLY | LIGHT SOURCE

- Average Power Consumption: 22Watts
- 220-240V AC, Suits 3 circuit 4 wire track (selux, EUTRAC & Global 3 circuit track)
- LED lifetime 50,000 hr LED **figure obtained under manufacturer’s test conditions*
- Cool White LED standard (warm white filters available on request)

FIXTURE DIMENSIONS

- Length: 220mm (including lens)
- Height: 210mm (if at 90° as shown below)
- Weight: 1.3kg

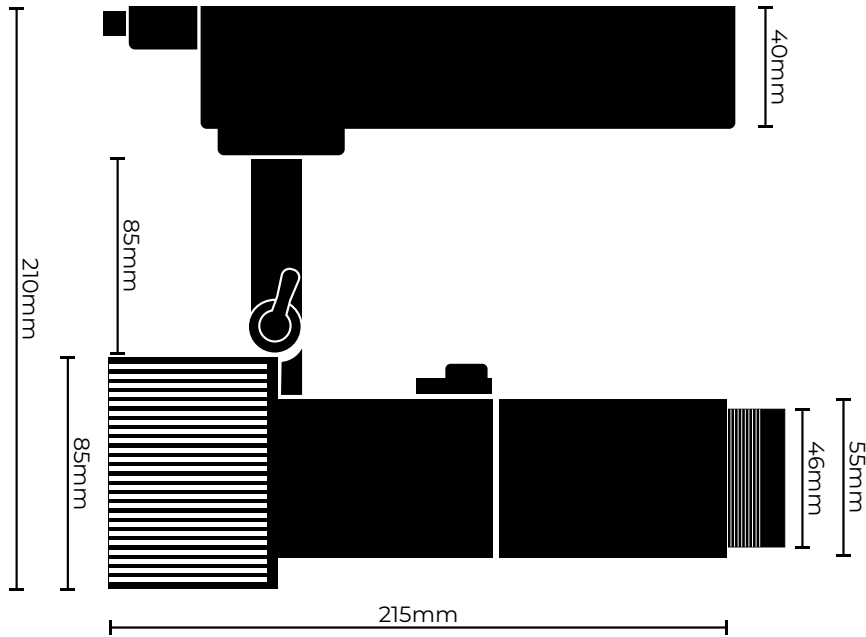

STANDARD WARRANTY

The standard warranty applies only to Grand Lighting products sold by Gobotech Pty Ltd or its authorised resellers, or country distributors. "Standard Warranty Period" means the warranty period applicable under the standard warranty being a period of 24 months from the original date of purchase of the Grand Lighting product(s) unless specifically noted and agreed to otherwise. This warranty also applies to drivers and power supplies that Gobotech have matched and sold with the Grand Lighting product.

Gobotech Pty Ltd or Grand Lighting will not be held responsible for any loss, damage, cost or expense incurred as a result of the installation or removal of any Grand Lighting product for any reason nor does this warranty cover any Grand Lighting product that has become defective due to an accident, act of god, improper installation, power surge, unreasonable use, improper service or unauthorised modification or adjustment of drivers or other causes not arising out of defects in material and workmanship. Normal wear and effects of weather that do not affect the safety or operation of the light are not covered by this warranty.

In the event that Grand Lighting is unable to replace or repair any defective Grand Lighting product under the warranty it will use reasonable endeavours to provide an alternative of similar specification and quality. Whilst reasonable endeavours will be taken to match the light quality, LED bin and/or colour temperature of the LED's used for any replacements, it may not always be possible to do so, due to the age of the product, changes in the LED suppliers product specification and availability. In these circumstances Grand Lighting will use reasonable endeavours to offer the closest alternative available.

Replacement parts provided under the warranty are warranted on the same terms and for the remainder of the warranty period of the Grand Lighting products they are replacing or in which they are installed.

Gobotech guarantees that Grand Lighting products are free from defects in materials or workmanship under normal use during the standard warranty period.

During the standard warranty period, Gobotech will, (following prompt written notice of the issue(s) and a reasonable period for investigation) at its discretion, repair or replace either the whole Grand Lighting product or any part of it that Gobotech deems to be defective as a result of a material or manufacturing fault. Gobotech will not be in any way liable under the standard warranty in respect to any Grand Lighting product that:

- 1) Was not originally installed in accordance with:
 - a) The installation instruction supplied with, or printed on, the Grand Lighting product or published on the Grand Lighting website (www.grandlighting.com.au)
 - b) The standards of good practice.
- 2) Was not installed in suitable environmental conditions (including but not limited to ambient temperature, moisture level and air flow for that particular Grand Lighting product;
- 3) Has been altered or modified in any way by third parties not authorised by Gobotech to do so;
- 4) Has been subject to misuse (including but not limited to incorrect operation by the user or connection to or operation with an unsuitable power supply);
- 5) Has been previously repaired by a person other than an authorised representative of Gobotech

The standard warranty period will only be valid if the date of purchase is confirmed by an official invoice issued at the time of purchase.

SERVICE, WARRANTY CLAIMS AND RETURNS

In order to make a claim under the warranty and receive the Return Authorisation Form, please contact:

Gobotech Pty Ltd - www.gobotech.com.au

Please contact Gobotech for any items that are faulty and out of warranty to obtain a quote from our service department to either fix or replace parts where possible.

All carriage, insurance and return charges or duties are the responsibility of the customer and are not covered by the warranty. Grand Lighting products returned under the warranties should be appropriately packaged to prevent damage during transit. Any return of Grand Lighting products under the warranty is done at the sole risk of the customer and Gobotech will not be liable for any damages or losses sustained during transit.